


1. M4 STEEL WASHER
2. M4 STEEL FULL NUTS
3. CABLE END
4. CONNECTING CABLE
5. CURTAIN WIRE EYE
6. M4 X 25 STEEL CSK SCREW
7. CURTAIN WIRE

USE SCREW (6) TO ADJUST POSITION OF CURTAIN WIRE SUGGESTED POSITION, TOP OF WIRE 1mm BELOW TOP FACE OF BENDER

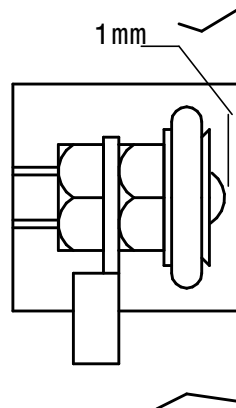

HEATER WIRE END ASSEMBLY.

SK2.